


NEW CONSTRUCTION WINDOWS THERMAL PERFORMANCE


SERIES 800 FIXED HEAVY PICTURE WINDOW

PRODUCT SERIES	GLAZING TYPE	U-FACTOR	SHGC	VLT
	PPG SB 70XL Low-E I.G. w/ Argon Gas	0.34	0.25	0.57
Series 800	Cardinal 270 Low-E I.G. w/ Argon Gas	0.33	0.33	0.62
	Cardinal 340 Low-E I.G. w/ Argon Gas	0.33	0.16	0.35
Fixed	Cardinal 366 Low-E I.G. w/ Argon Gas	0.32	0.25	0.58
Heavy Picture Window	PPG SB 70XL Low-E I.G. w/ Argon Gas & Muntins	0.34	0.22	0.52
	Cardinal 270 Low-E I.G. w/ Argon Gas & Muntins	0.33	0.30	0.56
	Cardinal 340 Low-E I.G. w/ Argon Gas & Muntins	0.33	0.15	0.31
	Cardinal 366 Low-E I.G. w/ Argon Gas & Muntins	0.32	0.22	0.52

Test Methods: NFRC 100-2004 for U-Factor, NFRC 200-2004 for SHGC and Visible Light Transmittance

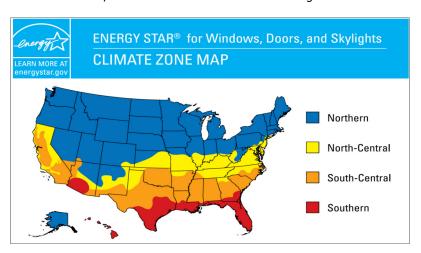

International Energy Conservation Code (IECC) Climate Regions

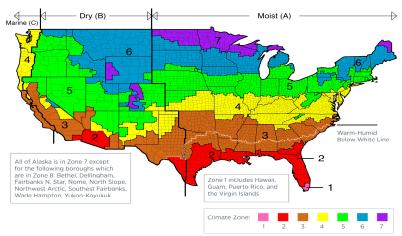

For more information on RAM Windows, visit us online at www.ramwindows.com or call us at 281-495-9056.