AAMA/WDMA/CSA 101/I.S.2/A440
Performance Test Report

Rendered To:
Ram Windows and Doors

Report No.:
QCT23-7078.03-R3

Series/Product(s):
S3000/4000 XXO Hybrid SGD
Sliding Door

Test Date(s):
December 14, 2023 through December 18, 2023

Revised Report Date:
January 7, 2026

QUAST CONSULTING AND TESTING, INC.
Exterior Façade/Fenestration Consulting Testing
1055 Indianhead Drive • Mosinee, WI 54455-0241 • Phone: 715-693-TEST (8378) • Fax: 715-693-0689
www.qct-usa.com

Quast Consulting & Testing INC.

Report Date: 01/07/26
Test Dates: 12/14/23
Through: 12/18/23

MANUFACTURER: Ram Windows and Doors
5615 W Fuqua St
Houston, TX 77085

SERIES/MODEL: S3000/4000 XXO Hybrid SGD
PRODUCT TYPE: Sliding Door

Summary of Results	
Test Procedure/Standard	**Details**
AAMA/WDMA/CSA 101/I.S.2/A440-22	Class LC - PG25: Size Tested 3658 x 3048 mm (~144 x 120 in) - Type SD
AAMA/WDMA/CSA 101/I.S.2/A440-17	Class LC - PG25: Size Tested 3658 x 3048 mm (~144 x 120 in) - Type SD
CSA A440S1-19	Class LC - PG25: Size Tested 3658 x 3048 mm (~144 x 120 in) - Type SD
CSA A440S1-17	Class LC - PG25: Size Tested 3658 x 3048 mm (~144 x 120 in) - Type SD
Operating Force (ASTM E2068-00/NAFS-	See Results, PASS
Air Infiltration Resistance (ASTM E283-04)	1.2 L/s/m² (0.24 cfm/ft²) @ 75 Pa (1.57 psf), PASS
Air Exfiltration Resistance (ASTM E283-04)	1.1 L/s/m² (0.21 cfm/ft²) @ 75 Pa (1.57 psf), PASS
Canadian Air Infiltration/Exfiltration (ASTM E283-04)	1.2 L/s/m² (0.23 cfm/ft²) Average @ 75 Pa (1.57 psf), Level A2
Cyclic Water Penetration Resistance (ASTM E547-00)	No Penetration @ 180 Pa (3.76 psf), PASS
Uniform Load Deflection (ASTM E330-14)	+1440 Pa (30.1 psf) / -1440 Pa (30.1 psf), PASS
Uniform Load Structural (ASTM E330-14)	+2160 Pa (45.1 psf) / -2160 Pa (45.1 psf), PASS
Forced Entry Resistance (ASTM F842-17)	Grade: 10, Assembly Type: A, PASS
Deglazing Resistance (ASTM E987-88)	See Results, PASS

Reference Report No. QCT23-7078.03-R3 for complete specimen description and test results.

Project Summary:

Quast Consulting and Testing, Inc. was contracted by Ram Windows and Doors to perform testing per AAMA/WDMA/CSA 101/I.S.2/A440 on an S3000/4000 XXO Hybrid SGD. The specimen was supplied by Ram Windows and Doors. Testing was conducted at Quast Consulting and Testing Located in Mosinee, WI. Specimen description and test results are reported herein.

Procedure:

Testing and reporting were conducted in accordance with the following standards/specifications:

AAMA/WDMA/CSA 101/I.S.2/A440	*North American Fenestration Standard/Specification for Windows, Doors and Skylights*
CSA A440S1	*Canadian Supplement to North American Fenestration Standard/Specification for Windows, Doors and Skylights*
ASTM E283-04 (2012)	*Standard Test Method for Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen*
ASTM E330-14 (2021)	*Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference*
ASTM E547-00 (2016)	*Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Cyclic Static Air Pressure Difference*
ASTM E987-88 (2017)	*Test Method for Deglazing Force of Fenestration Products*
ASTM F842-17 (2023)	*Standard Test Methods for Measuring the Forced Entry Resistance of Sliding Door Assemblies, Excluding Glazing Impact*
ASTM E2068-00 (2016)	*Test Method for Determination of Operating Force of Sliding Windows and Doors*

Sliding Door Primary Designators:

AAMA/WDMA/CSA 101/I.S.2/A440-22	Class LC - PG25: Size Tested 3658 x 3048 mm (~144 x 120 in) - Type SD
AAMA/WDMA/CSA 101/I.S.2/A440-17	Class LC - PG25: Size Tested 3658 x 3048 mm (~144 x 120 in) - Type SD
CSA A440S1-19	Class LC - PG25: Size Tested 3658 x 3048 mm (~144 x 120 in) - Type SD
CSA A440S1-17	Class LC - PG25: Size Tested 3658 x 3048 mm (~144 x 120 in) - Type SD

Sliding Door Secondary Designators:

Positive Design Pressure:	1440 Pa (30.1 psf)
Negative Design Pressure:	1440 Pa (30.1 psf)

Test Specimen Description:

Frame Size: 3658 mm (144.00 in) wide x 3048 mm (120.00 in) high
Panel Size: 1259 mm (49.56 in) wide x 3000 mm (118.13 in) high
Glass Size: 1138 mm (44.81 in) wide x 2864 mm (112.75 in) high

Frame Construction:

The extruded aluminum frame members were thermally broken using polyamide struts. The corners were square cut and sealed with silicone. Aluminum end plates were attached to the head using two #8-32 x 3/4" PH screws and attached to the sill using four #8-32 x 3/4" PH screws.

Door Panel Construction:

The extruded aluminum door panel members were square cut and attached using 3/8" threaded rods through the top rails and 5/16" threaded rods through the bottom rails. The rods were secured inside the stiles using a clamping block and nut. Aluminum rail extensions were attached to the bottom of all panel interlock stiles using two #8-32 x 3/4" PH screws per extension. An aluminum stile cap was attached to the bottom of non-interlock stiles using four #6 x 3/4" FH screws per cap. A silicone fillet seal was applied to the stationary panel to frame interface at the exterior head, sill, and jamb.

Glazing:

The panels were glazed with 1" insulated glass units comprising 1/4" tempered, 1/2" air space with stainless steel spacer, 1/4" tempered. The glass was set from the interior against a bead of silicone and secured with an aluminum stop and wedge gasket. The glass was set on 1/8" silicone setting blocks with a 1/2" bite.

Reinforcement: None

Weatherstripping:	Quantity	Location
0.190" Single Fin Pile Gasket	24	Frame, interior and exterior legs and both sides of parting stops.
0.150" Single Fin Pile Gasket	6	Both panel interlocks.
Foam-Filled Vinyl Gasket	6	Both panel interlocks.
Closed-Cell Dust Plug	3	Head, above operable panel interlock stiles.
1/2" x 1/2" x 2-1/2" Open-Cell Foam Block	4	Sill, exterior parting stop channel under both center panel stiles. Interior and exterior parting stop channel under operable to operable panel interlock stiles.
Roll-In Wedge Gasket	12	Glazing stops.

Hardware:	Quantity	Location
4600 Quad Series Rollers	4	Attached to roller mounts using two 1/4-20 x 1/2" FH screws per roller.
Roller Mount	4	1 per roller. Attached to operable panel rails using four #8-32 x 3/4" PH screws per mount.
Locking Handle	1	Primary operable panel lock stile, 36" from bottom rail.
Lock Strike	1	Attached through jamb into buck using two #10 x 2-1/2" FH screws.

Drainage:	Quantity	Location
1/4" x 1/4" Notch	Varies	See as-built drawings

Installation:

The specimen was installed into an 8" x 8" x 3/16" HSS chamber opening lined with two layers of 2x10 pine with a 1/4" perimeter joint. The specimen was anchored through the head using three rows and the jambs using four rows of #10 x 2-1/2" FH screws. See As-Built Drawings for anchorage

Test Results:

NAFS §:	Title of Test	Results	Allowed
8.3.1	**Operational Force Test Per ASTM E2068-00**		
	Latch	**PASS**	
	Opening Force	6 N (1.3 lbf)	100 N (22.48 lbf)
	Closing Force	9 N (2.0 lbf)	100 N (22.48 lbf)
	Primary Active Panel	**PASS**	
	Breakaway Force	91 N (20.4 lbf)	135 N (30.25 lbf)
	Opening Force	79 N (17.7 lbf)	90 N (20.23 lbf)
	Closing Force	79 N (17.7 lbf)	90 N (20.23 lbf)
8.3.2	**Air Infiltration/Exfiltration per ASTM E283-04**		
	Infiltration	**PASS**	
	75 Pa	1.2 L/s/m^2	1.5 L/s/m^2
	1.57 psf	0.24 cfm/ft^2	0.30 cfm/ft^2
	Exfiltration	**PASS**	
	75 Pa	1.1 L/s/m^2	1.5 L/s/m^2
	1.57 psf	0.21 cfm/ft^2	0.30 cfm/ft^2
A4.4.3.5	**Canadian Air Infiltration/Exfiltration per ASTM E283-04**		
	Sliding Door	**PASS**	
	75 Pa (1.57 psf)	**Level A2**	**Level A2**
	Infiltration	1.2 L/s/m^2	1.5 L/s/m^2
		0.24 cfm/ft^2	0.30 cfm/ft^2
	Exfiltration	1.1 L/s/m^2	1.5 L/s/m^2
		0.21 cfm/ft^2	0.30 cfm/ft^2
	Average	1.20 L/s/m^2	
		0.23 cfm/ft^2	

The tested specimen meets or exceeds the performance levels specified in AAMA/WDMA/CSA 101/I.S.2/A440 for air leakage resistance

Test Results (Continued):

NAFS §:	Title of Test	Results	Allowed
9.3.3	**Cyclic Water Penetration Resistance per ASTM E547-00** Water applied at a rate not less than 5 gallons per square foot per hour Temperature: 20 C (68 F)		
	Specimen #1 180 Pa (3.76 psf)	**PASS** No Penetration	 No Penetration
8.3.4.2	**Uniform Load Deflection per ASTM E330-14** Plastic film was not used to prevent air leakage		
	Specimen #1		
	Positive Load:	1440 Pa (30.1 psf)	
	Negative Load:	1440 Pa (30.1 psf)	
	Left Interlocking Stiles	**PASS**	
	Span (L):	2946 mm (116 in)	Reported
	Positive Deflection:	25.0 mm (0.98 in)	Reported
	Negative Deflection:	28.3 mm (1.12 in)	Reported
8.3.4.3	**Uniform Load Structural per ASTM E330-14** Plastic film was not used to prevent air leakage		
	Specimen #1		
	Positive Load:	2160 Pa (45.1 psf)	
	Negative Load:	2160 Pa (45.1 psf)	
	Left Interlocking Stiles	**PASS**	
	Span (L):	2946 mm (116 in)	L*0.4%
	Positive Permanent Set:	2.2 mm (0.09 in)	11.7 mm (0.46 in)
	Negative Permanent Set:	2.3 mm (0.09 in)	11.7 mm (0.46 in)

Test Results (Continued):

NAFS §:	Title of Test	Results	Allowed
8.3.5	**Forced Entry Resistance per ASTM F842-17**		
	Disassembly and Lock/Hardware Manipulation Tools 5" long #2 Phillips screwdriver Standard slot-type pliers 6-7" in length Putty Knife with 24 Ga x 3/4" wide x 3-1/2" blade 16 Ga x 9" long black annealed wire		
	Concentrated Load Tools Drill operated cable winch Chatillion 150 and 500 lbf spring scales, Pelouze 220 lbf spring scales		
	Specimen #1	**PASS**	
	Grade: 10 Assembly Type: A T1 = 5 min, L1 = 1334 N (300 lbf), L2 = 778 N (175 lbf) L3 = 133 N (30 lbf), L4 = 222 N (50 lbf) + Panel wt		
	Disassembly Test	No Entry/Damage	No Entry/Damage
	Concentrated Load Tests	No Entry/Damage	No Entry/Damage
	Lock/Hardware Manipulation Test	No Entry/Damage	No Entry/Damage
	Sash Manipulation Test	No Entry/Damage	No Entry/Damage
8.3.6.2	**Deglazing Test per ASTM E987-88**		
	Primary Active Panel	**PASS**	
	Product Type: Horizontal Sliding		
	Horizontal Member Load	230 N (51.7 lbf)	
	Vertical Member Load	320 N (71.9 lbf)	
	Horizontal Member Glazing Bite	12.7 mm (0.50 in)	90%*Bite
	Vertical Member Glazing Bite	12.7 mm (0.50 in)	
	Top Rail Deflection	0.0 mm (0.00 in)	11.4 mm (0.45 in)
	Bottom Rail Deflection	0.3 mm (0.01 in)	11.4 mm (0.45 in)
	Left Stile Deflection	0.0 mm (0.00 in)	11.4 mm (0.45 in)
	Right Stile Deflection	0.0 mm (0.00 in)	11.4 mm (0.45 in)

List of Official Observers:

Name:	Company:
Arlen Fisher	Quast Consulting and Testing, Inc.
Beau Enochson	Ram Windows and Doors
Raymond Watson	Ram Windows and Doors

Test specimen drawings have been reviewed by Quast Consulting and Testing, Inc. and are representative of the test specimen reported herein. Material compositions were supplied by the manufacturer and were not verified by QCT.

The reported results were secured using the designated test methods. Test results relate only to the specimen tested. Statements of conformity are determined using the simple acceptance decision rule per ILAC-G8:09-2019. No conclusions regarding the quality of the glass can be made. This report does not constitute certification of this product nor an opinion or endorsement by this laboratory. This report is the exclusive property of the client so named herein and may not be reproduced, except in full, without the written approval of Quast Consulting and Testing, Inc.

Electronic records of data sheets, drawings, correspondence, this report, or other pertinent project documentation will be retained for a period of 10 years from the test completion date. Physical representative samples of the test specimen will be retained for a period of 2 years from the test completion date. At the end of this retention period, such material shall be discarded without notice and the service life of this report will expire.

QUAST CONSULTING & TESTING, INC.

Arlen Fisher, P.E.
Author

QUAST CONSULTING & TESTING, INC.

Brian M. Sasman, P.E.
Reviewer

Attachments: This report is complete only when all attachments listed are included.
Appendix A: As-Built Drawings (71 Pages)


Document Control Issue Log

Report #	Date	Description
QCT23-7078.03	5/3/2024	Original Report
QCT23-7078.03-R1	7/11/2024	Changed Series Name
QCT23-7078.03-R2	11/17/2025	Changed Series Name
QCT23-7078.03-R3	1/7/2026	Revised anchorage description and drawing.


RAM S3000, XXO SLIDING DOOR

REVISIONS		
REV	DESCRIPTION	DATE
0	INITIAL RELEASE	03/12/2024


PANELS STACKED

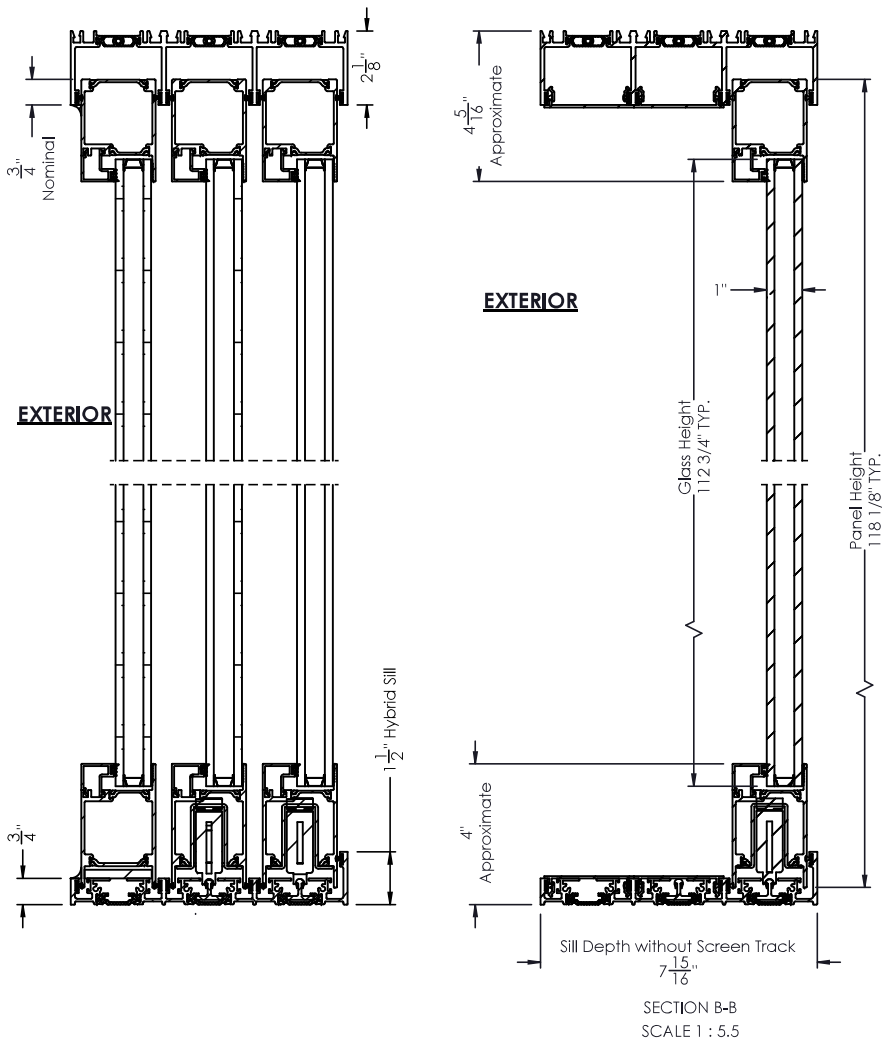

SECTION B-B
SCALE 1 : 5.5

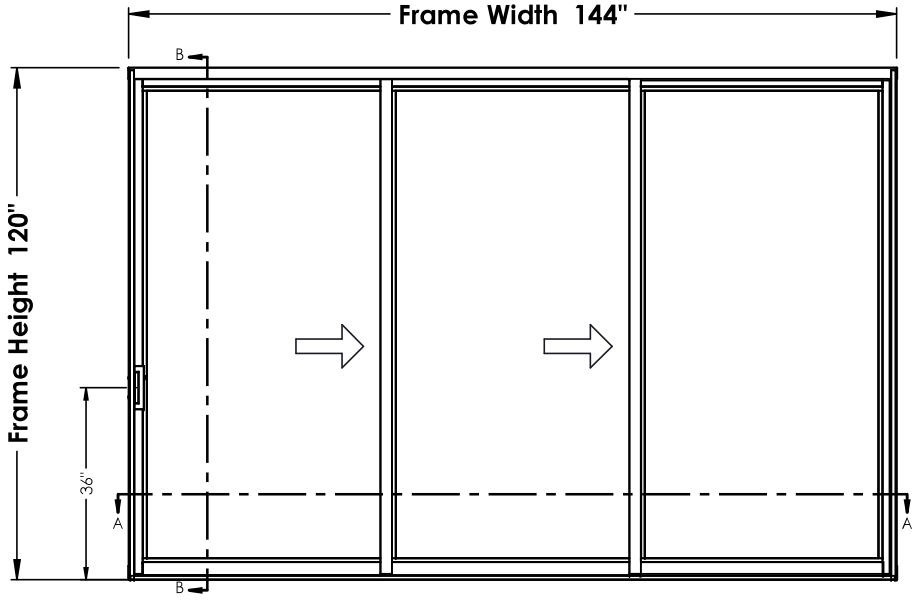

EXTERIOR ELEVATION

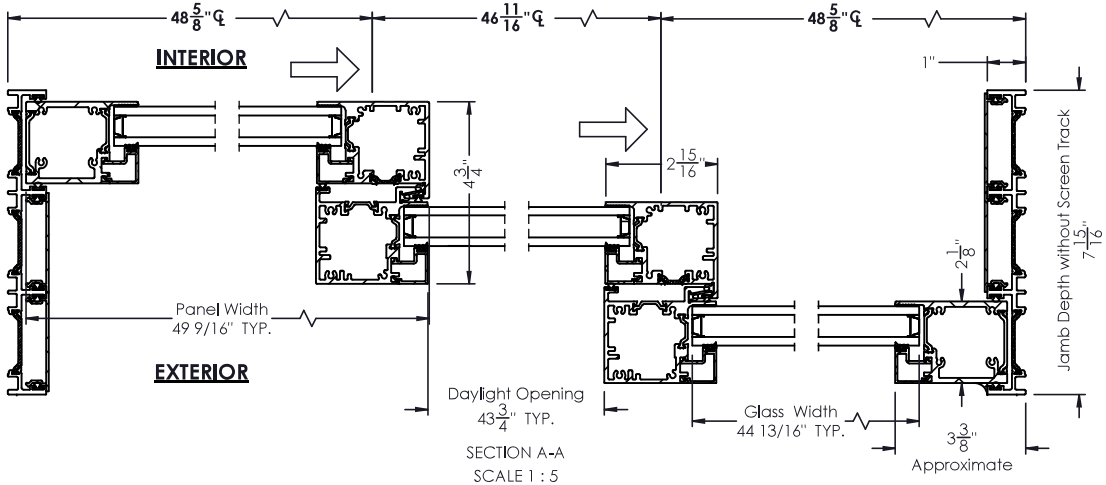

SECTION A-A
SCALE 1 : 5

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SO PROPERTY OF RA WINDOWS & DOO ANY REPRODUCTIC IN PART OR AS A WHOLE WITHOUT T WRITTEN PERMISSIC OF RAM WINDOWS DOORS IS PROHIBITED.

Drawings represent specimen as-tested
QCT23-7078.03
Date: 01/07/2026
Reviewed by: AF

Quast Consulting & Testing INC.

RAM WINDOWS & DOORS

LEAD TIME	
GLASS WARRANTY	
FRAME WARRANTY	
FINISH WARRANTY	
SECTION	
SHGC	
)A GLASS THICKNESS	1"

CUSTOMER	RAM S3000
PROJECT	XXO SLIDING DOOR
CITY	
STATE	
OUTER GLASS	
AIR SPACE	
INNER GLASS	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES:

FRACTIONAL: ± 1/16
ANGULAR: MACH/BEND: ± 1
TWO PLACE DECIMAL ± 0.01
THREE PLACE DECIMAL ± 0.005

MATERIAL:

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	BE	3/14/2024
ENG		
MARK		
QTY.		
FINISH		
DP		
SCALE: 1:36		

RAM WINDOWS AND DOORS

TITLE: RAM S3000, XXO SLIDING DOOR

SIZE	WTS NUMBER	REV
A	XXO-Top-Assembly-71103-3-AWS	0
	WEIGHT: 696.829	SHEET 1 OF 4